



POWER-D


Peak Capacity Performance



POWER-D I/O Connectors are designed for rugged / robust applications where both power & signal are required from a single connection. Featuring "Solid Pin" machined contacts, these connectors offer high reliability performance for the most challenging design applications

FEATURES & BENEFITS

- Available in 12 industry standard sizes
3W3, 3W3K, 5W1, 5W5, 7W2, 8W8, 9W4
11W1, 13W3, 17W2, 21W1, 21WA4
- Solder cup, vertical mount, right angle, crimp & poke
- Screw machined contacts for high mating cycles
- Power contacts rated for 20/40 AMPs
- Signal contacts rated for 5 AMPs
- Inter-mates with most commercial equivalent products
- Cable assemblies available
- AVAILABLE IN IP67 SEAL-D VERSIONS

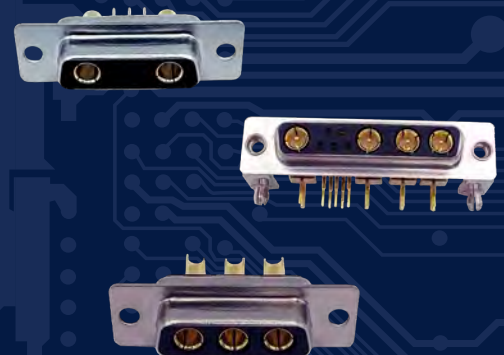

NORCOMP

POWER-D

*Peak
Capacity
Performance*

Combined Power & Signal D-Subs

Cable Mount

Solder Cup - Plug
Solder Cup - Socket

Series

680MYWY103LYY1
680MYWY203LYY1

Sizes

3W3, 3W3K, 5W1, 5W5
7W2, 8W8, 9W4 11W1
13W3, 17W2, 21W1, 21WA4

Vertical Board Mount

PCB Mount - Plug
PCB Mount - Socket

Series

681MYWY103LYY1
681MYWY203LYY1

Sizes

3W3, 3W3K, 5W1, 5W5
7W2, 8W8, 9W4 11W1
13W3, 17W2, 21W1,

Right Angle Board Mount

PCB Mount - Plug
PCB Mount - Socket

Series

684MYWY103L461
684MYWY203L461

Sizes

3W3, 3W3K, 5W1, 5W5
7W2, 8W8, 9W4 11W1
13W3, 17W2, 21W1, 21WA4

Crimp & Poke

Cable Mount - Plug
Cable Mount - Socket



Series

680MYWY173LYY1
680MYWY273LYY1

Sizes


3W3, 5W5, 7W2, 9W4
13W3, 17W2, 21WA4



Right Angle Board Mount



Crimp & Poke

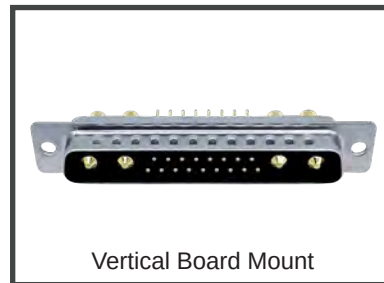

Vertical Board Mount



Solder Cup Plug



Co-axial



Solder Cup Socket

*Screw machined
contacts for high
mating cycles*

