



FRONT MOUNTED (RECOMMENDED FOR 580-M SOLDER CUP SERIES)

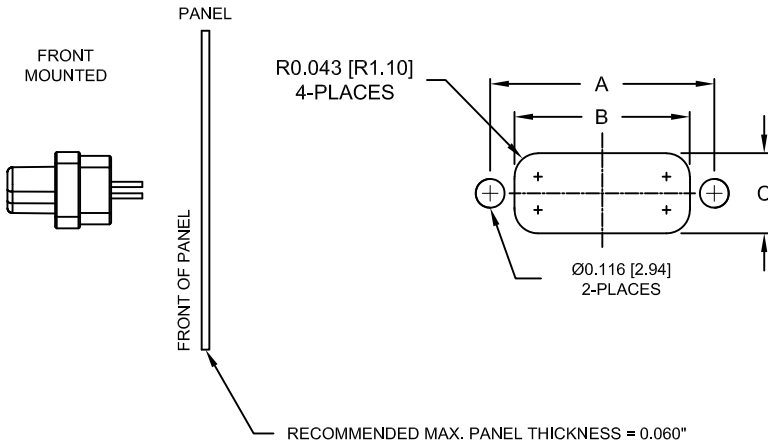

	A	B	C
9 POSITION MALE	0.565 [14.35]	0.398 [10.10]	0.268 [6.80]
9 POSITION FEMALE	0.565 [14.35]	0.309 [7.85]	0.118 [3.00]
15 POSITION MALE	0.717 [18.20]	0.547 [13.90]	0.268 [6.80]
15 POSITION FEMALE	0.717 [18.20]	0.475 [12.06]	0.118 [3.00]
25 POSITION MALE	0.967 [24.55]	0.797 [20.25]	0.268 [6.80]
25 POSITION FEMALE	0.967 [24.55]	0.725 [18.41]	0.118 [3.00]

TOLERANCE = +0.010/-0.000 inch

REAR MOUNTED (RECOMMENDED FOR 580-M VERTICAL SOLDER AND 581-M SERIES)

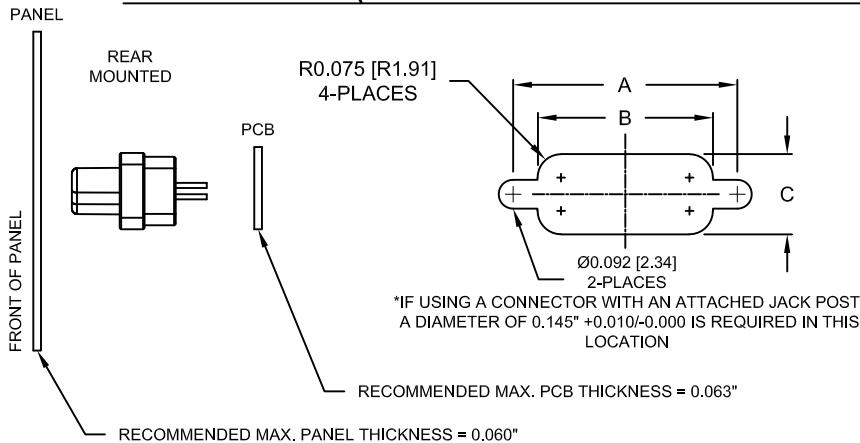

	A	B	C
9 POSITION	0.565 [14.35]	0.410 [10.41]	0.256 [6.50]
15 POSITION	0.717 [18.20]	0.560 [14.22]	0.256 [6.50]
25 POSITION	0.967 [24.55]	0.810 [20.57]	0.256 [6.50]

TOLERANCE = +0.010/-0.000 inch

NOTES:

- THESE DIMENSIONS ARE RECOMMENDED BUT MAY NOT SUIT ALL APPLICATIONS
- IF YOU HAVE ANY QUESTIONS REGARDING THESE DIMENSIONS PLEASE REACH OUT TO ENG@NORCOMP.NET
- DIMENSIONS ONLY TO BE USED WITH 580-M & 581-M SERIES

RoHS COMPLIANT

UNITS = inch[mm]

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

J. KADEL

DATE:

08/31/2020

NorComp

SCALE:

NTS

SHEET

1

OF

1

REV

3

DWG NO.

58Y-M PANEL MOUNT CUTOUT